
This Detail Drawing may not be altered or changed in any manner except by the City Engineer. It is the responsibility of the user to acquire the most current version.

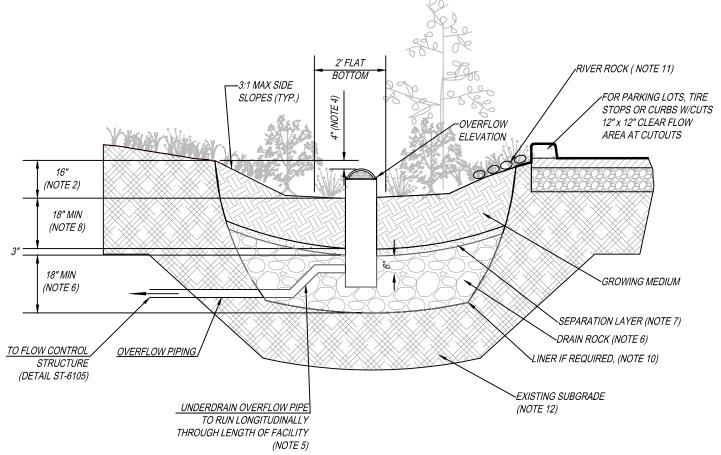

GENERAL NOTES:

- 1. PROVIDE PROTECTION FROM ALL VEHICLE TRAFFIC, EQUIPMENT STAGING, AND FOOT TRAFFIC IN PROPOSED INFILTRATION AREAS PRIOR TO, DURING AND AFTER CONSTRUCTION. UNLESS REQUIRED BY SITE CONDITIONS, UNLINED RAIN GARDENS ARE PREFERRED TO MAXIMIZE ONSITE INFILTRATION.
- 2. DIMENSIONS:
 - -DEPTH OF BASIN (FROM TOP OF GROWING MEDIUM TO OVERFLOW ELEVATION); 12"
 - -FLAT BOTTOM WIDTH: 2' MINIMUM
 - -SIDE SLOPES OF RAIN GARDEN: 3:1 MAXIMUM
 - -CENTERLINE SLOPE OF RAIN GARDEN: 0.5% OR LESS
- 3. SETBACKS:
 - -FILTRATION RAIN GARDEN SHALL BE 10' FROM FOUNDATIONS AND 5' FROM PROPERTY LINES UNLESS APPROVED BY BUILDING OFFICIAL
- 4. OVERFLOW:
 - -OVERFLOW REQUIRED. INLET ELEVATION SHALL ALLOW FOR 4" OF FREEBOARD, MINIMUM.
 - PROTECT FROM DEBRIS AND SEDIMENT WITH STRAINER OR GRATE.
- 5. PIPING:

-PERFORATED UNDER-DRAIN PIPING: SHALL RUN LONGITUDINALLY THROUGH LENGTH OF FACILITY, SHALL BE ABS SCH. 40, CAST IRON, OR PVC SCH.40. MINIMUM DIAMETER IS 6". PIPING SHALL HAVE 1% GRADE AN FOLLOW THE UNIFORM PLUMBING CODE. PVC NOT ALLOWED ABOVE GROUND. WRAP UNDER-DRAIN IN FILTER FABRIC TO REDUCE TRANSPORT OF FINES. OVERFLOW PIPING: SHALL BE ABS SCH. 40, CAST IRON, OR PVC SCH. 40 AND SHALL NOT BE PERFORATED. MINIMUM DIAMETER IS 6". PIPING SHALL HAVE 1% GRADE AND FOLLOW THE UNIFORM PLUMBING CODE. PVC NOT ALLOWED ABOVE GROUND.

- 6. DRAIN ROCK:
 - -SIZE: 1 1/2" to 3/4"-0 WASHED
 - -DEPTH: 18" MINIMUM
- . SEPARATION BETWEEN DRAIN ROCK AND GROWING MEDIUM: SHALL BE A 3" LAYER OF 3/4" 1/4" OPEN GRADED AGGREGATE.
- 8. GROWING MEDIUM:
 - -DEPTH: 18" MINIMUM
 - -SEE APPENDIX A FOR SPECIFICATION OR USE SAND/LOAM/COMPOST 3-WAY MIX.
 - -FACILITY SURFACE AREA MAY BE REDUCED BY 25% WHEN GROWING MEDIA DEPTH IS INCREASED TO 30" OR MORE.
- VEGETATION: FOLLOW LANDSCAPE PLANS OR REFER TO PLANTING REQUIREMENTS IN APPENDIX A.
- 10. WATERPROOF LINER (IF REQUIRED): SHALL BE 30 MIL PVC OR EQUIVALENT.
- 11. INSTALL RIVER ROCK SPLASH PAD OVER A NON WOVEN GEO TEXTILE FABRIC TO TRANSITION FROM INLETS TO GROWING MEDIUM. SIZE OF ROCK SHALL BE 1" 3", 4 SQUARE FEET, 6" DEEP.
- 12. SEASONAL HIGH GROUNDWATER SEPARATION:
 - -SEPARATION DISTANCE AS REQUIRED BY CITY.

Rain Garden - Filtration			CITY OF	
DRAWING NUMBER: ST-6020	DRAWN BY: SR	SCALE: N.T.S.	WILSONVILLE	
FILE NAME: ST-6020.DWG	APPROVED BY: NK	DATE: 4/16/18	PUBLIC WORKS STANDARDS	