


This Detail Drawing may not be altered or changed in any manner except by the City Engineer. It is the responsibility of the user to acquire the most current version.



LEFT TURN SHARROW (WHITE)

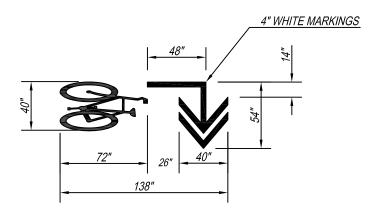


RIGHT TURN SHARROW (WHITE)



BIKE RIGHT TURN STENCIL (WHITE)


CENTER MARKING WITHIN LANE WIDTH FOR PROPORTION DETAILS, SEE CURRENT VERSION OF STANDARD HIGHWAY SIGNS




SHARROW (WHITE)

SHARROW NOTES:

- 1. ON STREET PARKING: CENTER SHARROW 11.5' FROM CURB FACE.
- 2. NO ON-STREET PARKING: CENTER SHARROW 4.5' FROM CURB FACE.
- 3. PLACE SHARROWS AFTER INTERSECTION, 10 FEET PAST EXTENDED BACK OF WALK OR 25 FEET PAST EXTEND CURB LINE.
- 4. SPACE SHARROWS NOT GREATER THAN 250 FEET





BIKE LEFT TURN STENCIL (WHITE)

CENTER MARKING WITHIN LANE WIDTH FOR PROPORTION DETAILS, SEE CURRENT VERSION OF STANDARD HIGHWAY SIGNS

Pavement Markings Page 5			
DRAWING NUMBER: RD-1285	DRAWN BY: SR	SCALE: N.T.S.	
FILE NAME: RD-1285.DWG	APPROVED BY: PN	DATE: 5/16/19	

CITY OF WILSONVILLE



PUBLIC WORKS STANDARDS